


MODEL H312 HDPE FLANGE ADAPTER

The **Shurjoint** Model H312 HDPE flange adapter provides for the direct transition from HDPE pipe or fittings to ANSI class 125 or 150 flanged components. The H312 can be rotated for fast and easy bolt alignment prior to tightening. The gasket seals both on the outside of the pipe and to the flange face providing a leak-tight seal when secured in place.

 H312 HDPE Flange Adapter should always be installed so that the coupling bolt pads make metal to metal contact.




Working Pressure: Since the physical strength of the **Shurjoint** HDPE couplings is much greater than HDPE pipe, working pressures are governed by the working pressures of the HDPE pipe, which vary depending on pipe composition, wall thickness and service temperatures.



CAUTION

Shurjoint HDPE couplings are not intended for use on PVC, PP or other materials.

Shurjoint recommends the use of a silicone based lubricant for the HDPE series. Do not use the **Shurjoint** standard lubricant, which is designed for steel pipe use. Do not use hydrocarbon based oils, grease or soap based solutions either as this could lead joint failure.

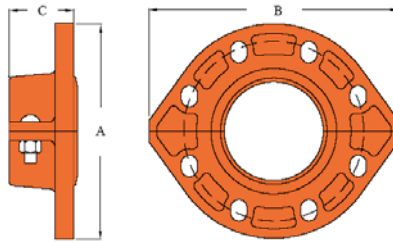

Full warranty terms can be found on www.shurjoint.com

Model H312 HDPE Flange Adapter										
Nom. Size	Actual Pipe OD	Coupling Dimensions			Draw Bolt / Nut		Flange Bolt / Nut *		Approx. Weight	
		A	B	C	No.	Size	No.	Size		
in	in	in	in	in		in		in	Lbs	
mm	mm	mm	mm	mm					Kg	
3	3.500	7.75	8.86	3.10	2	5/8 x 2 1/2	4	5/8	10.6	
80	88.9	197	225	79					4.8	
4	4.500	9.00	10.25	3.10	2	5/8 x 2 1/2	8	5/8	15.0	
100	114.3	229	260	79					6.8	
6	6.625	11.00	12.25	3.75	2	5/8 x 2 1/2	8	3/4	21.5	
150	168.3	279	311	95					9.8	
8	8.625	13.50	14.75	3.42	2	3/4 x 2 3/8	8	3/4	28.8	
200	219.1	343	375	87					13.1	
10	10.750	16.00	21.00	4.25	4	3/4 x 2 3/8	12	7/8	42.9	
250	273.0	406	533	108					19.5	
12	12.750	19.02	24.00	4.25	4	3/4 x 2 3/8	12	7/8	51.5	
300	323.9	483	610	108					23.4	

* Flange bolts and nuts are to be prepared by installer.

MATERIAL SPECIFICATIONS

• **Housing:**

Ductile Iron to ASTM A536, Gr. 65-45-12 and or ASTM A395, Gr. 65-45-15, min. tensile strength 65,000 psi (448 MPa).

• **Surface Finish:**

- Orange color painted or red RAL3000 color painted.
- Electro-zinc plated (Option)
- Epoxy coated in red RAL3000 or other colors (Option)

• **Rubber Gasket:**

Grade "E" EPDM (Color code: Green stripe) Good for cold & hot water up to +230°F (+110°C). Also good for services for water with acid, water with chlorine, deionized water, seawater and waste water, dilute acids, oil-free air and many chemicals.

Not recommended for petroleum oils, minerals oils, solvents and aromatic hydrocarbons.

Maximum Temperature Range: -29°F (-34°C) to +230°F (+110°C)*.

*EPDM gaskets for water services are not recommended for steam services unless couplings or components are accessible for frequent gasket replacement.

- Grade "T" Nitrile** (Color code: Orange stripe) (Option)
Recommended for petroleum products, vegetable oils, mineral oils and air with oil vapors. Temperature range: -20°F to +180°F (-29°C to +82°C). Also good for water services under +150°F (+66°C).
Do not use for HOT WATER above +150°F (+66°C) or HOT DRY AIR above +140°F (+60°C)
- Other options: Grade "O" Fluoro-Elastomer, Grade "L" Silicone, etc. are also available upon request.

• **Draw Bolts & Nuts (Factory supplied):**

Heat treated carbon steel track bolts to ASTM A183 Gr. 2, zinc electroplated with heavy-duty hex nuts to ASTM A563. (Flange bolts and nuts are to be prepared by installer.)

General Notes:

- **Field Joint Test:** For one time only the system may be tested hydrostatically at 1½ times the maximum working pressure listed (AWWA C606 5.2.3).
- **Warning:** Piping systems must always be depressurized and drained before attempting disassembly and or removal of any components.
- **The 10 Year Limited Warranty** applies to manufacturing defects only and does not cover severe service/temperature applications or wear parts.
- **Shurjoint** reserves the right to change specifications, designs and or standard without notice and without incurring any obligations.

Job Name:	System No.	Location:
Contractor:	Approved:	Date:
Engineer:	Approved:	Date:

Shurjoint product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact **Shurjoint** Technical Service. **Shurjoint** reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligations to make such changes and modifications on **Shurjoint** products previously subsequently sold.