


MODEL Z05 RIGID COUPLING

- Angle-Pad Design -


The **Shurjoint** Model Z05 is an angle-pad design rigid coupling for moderate pressure piping services including fire mains, long straight runs and valve connections. The angle-pad design allows the coupling housings to slide along the bolt pads when tightened. The result is an offset clamping action which provides a rigid joint which resists so called ‘snaking’ of a long straight run. Support and hanging requirements correspond to ANSI B31.1, B31.9 and NFPA 13. With the removal of only one bolt you can make a fast and easy "swing-over" installation.

The **Shurjoint** Model Z05 is available with a standard “C” shaped or **GapSeal®** gasket in a variety of grades to meet your specific service requirements.

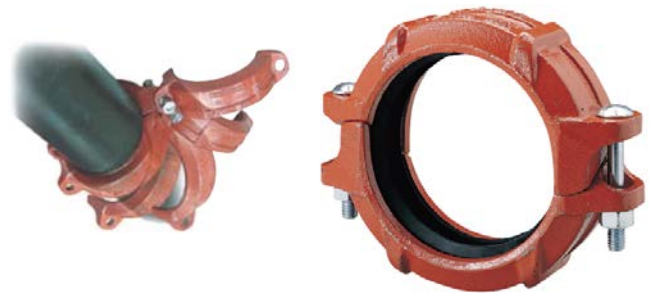

Z05 couplings should always be installed so that the coupling bolt pads make metal to metal contact.

For Fire Protection pressure rating, listing, and approval information, refer to Data Sheet B-42 or visit **SHURJOINT** website, www.shurjoint.com for details or contact your **SHURJOINT** Representative.

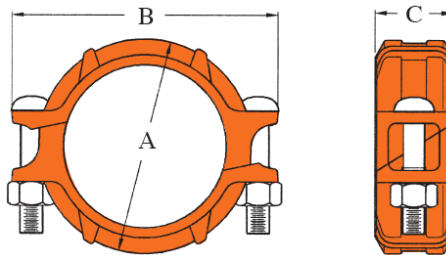

**10
YEAR
LIMITED
WARRANTY**

Full warranty terms can be found on www.shurjoint.com

Model Z05 Rigid Coupling

Nominal Size	Pipe OD	Max. Working Pressure (CWP)*	ASME/ANSI Pressure Class Rating^ @100°F/@38°C	Max End Load (CWP)	Axial displacement †	Dimension			Bolt Size	Weight	
						A	B	C			
in mm	in mm	PSI Bar	PSI Nom. Class	Lbs kN	in mm	in mm	in mm	in mm	No.	Lbs Kgs	
1¼ 32	1.660 42.2	500 35	300 150	1080 4.89	0 ~ 0.05 0 ~ 1.2	2.60 66	4.00 102	1.81 46	2	¾ x 2½ M10 x 55	1.41 0.64
1½ 40	1.900 48.3	500 35	300 150	1410 6.41	0 ~ 0.05 0 ~ 1.2	2.83 72	4.29 109	1.81 46	2	¾ x 2½ M10 x 55	1.46 0.66
2 50	2.375 60.3	500 35	300 150	2210 9.99	0 ~ 0.07 0 ~ 1.7	3.35 85	4.61 117	1.85 47	2	¾ x 2¾ M10 x 70	1.74 0.79
2½ 65	2.875 73.0	500 35	300 150	3240 14.64	0 ~ 0.07 0 ~ 1.7	3.86 98	5.20 132	1.85 47	2	¾ x 2¾ M10 x 70	2.05 0.93
76.1 mm	3.000 76.1	500 35	300 150	3530 15.91	0 ~ 0.07 0 ~ 1.7	3.94 100	5.35 136	1.85 47	2	¾ x 2¾ M10 x 70	2.16 0.98
3 80	3.500 88.9	500 35	300 150	4800 21.71	0 ~ 0.07 0 ~ 1.7	4.45 113	5.83 148	1.88 48	2	¾ x 2¾ M10 x 70	2.60 1.20
108.0 mm	4.250 108.0	500 35	300 150	7080 32.05	0 ~ 0.16 0 ~ 4.1	5.59 142	6.93 176	2.13 54	2	¾ x 2¾ M10 x 70	3.62 1.64
4 100	4.500 114.3	500 35	300 150	7940 35.89	0 ~ 0.16 0 ~ 4.1	5.75 146	7.17 182	2.09 53	2	¾ x 2¾ M10 x 70	4.12 1.87
133.0 mm	5.250 133.0	350 24	300 150	7570 33.33	0 ~ 0.16 0 ~ 4.1	6.69 170	8.82 224	213 54	2	½ x 3 M12 x 75	5.14 2.33
139.7 mm	5.500 139.7	350 24	300 150	8310 36.77	0 ~ 0.16 0 ~ 4.1	6.81 173	8.94 227	2.09 53	2	½ x 3 M12 x 75	5.67 2.57
5 125	5.563 141.3	350 24	300 150	8500 37.62	0 ~ 0.16 0 ~ 4.1	6.89 175	9.02 229	2.09 53	2	½ x 3 M12 x 75	5.69 2.58
159.0 mm	6.250 159.0	350 24	300 150	10730 47.63	0 ~ 0.16 0 ~ 4.1	7.80 198	9.84 250	2.13 54	2	½ x 3 M12 x 75	6.06 2.75

Model Z05 Rigid Coupling

Nominal Size	Pipe OD	Max. Working Pressure (CWP)*	ASME/ANSI Pressure Class Rating^ @100°F/@38°C	Max End Load (CWP)	Axial displacement †	Dimension			Bolt Size	Weight	
						A	B	C			
in mm	in mm	PSI Bar	PSI Nom. Class	Lbs kN	in mm	in mm	in mm	in mm	No.	Lbs Kgs	
165.1 mm	6.500 165.1	350 24	300 150	11600 51.35	0 ~ 0.16 0 ~ 4.1	7.87 200	9.69 246	2.13 54	2	½ x 3 M12 x 75	6.72 3.05
6 150	6.625 168.3	350 24	300 150	12050 53.36	0 ~ 0.16 0 ~ 4.1	8.00 203	9.80 249	2.13 54	2	½ x 3 M12 x 75	6.77 3.07
8 200	8.625 219.1	350 24	300 150	20430 90.44	0 ~ 0.19 0 ~ 4.8	10.40 264	12.99 330	2.52 64	2	¾ x 5 5/16 M16 x 135	13.38 6.07
200 JIS	8.516 216.3	350 24	300 150	19920 88.14	0 ~ 0.19 0 ~ 4.8	10.24 260	13.39 340	2.50 64	2	¾ x 4¾ M20 x 120	15.43 7.00

* Working Pressure is based on roll grooved standard wall carbon steel pipe.

^ The ASME/ANSI pressure class rating is not the design or maximum pressure rating, rather is provided for those that are accustomed to specifying or using ASME/ANSI pressure class rated components such as flange, valves, etc.

† Allowable Axial Displacement and Angular Movement (deflection) figures are for roll grooved standard steel pipe. Values for cut grooved pipe will be double that of roll grooved. These values are maximums; for design and installation purposes these figures should be reduced by: 50% for ¾"/DN20 – 3½"/DN90; 25% for 4"/DN100 and larger to compensate for jobsite conditions.

Performance Data

The following tables show the maximum working pressures (CWP) of **Shurjoint** Model Z05 Rigid Coupling used on both carbon steel and stainless steel pipes. **Shurjoint** ductile iron couplings can be used in conjunction with stainless steel pipe in non-corrosive environment as the flow media does not come in direct contact with the coupling housings but rather only the gasket.

Model Z05 on Carbon Steel Pipe					
Nom. Size	Cut-Grooved		Roll-Grooved		
	XS PSI / Bar	STD PSI / Bar	STD PSI / Bar	Sch. 10 PSI / Bar	Sch. 7 PSI / Bar
1¼	600	600	500	400	250
32	42	42	35	28	17
1½	600	600	500	400	250
40	42	42	35	28	17
2	600	600	500	400	250
50	42	42	35	28	17
2½	600	600	500	400	250
65	42	42	35	28	17
3	600	600	500	400	250
80	42	42	35	28	17
4	600	600	500	400	200
100	42	42	35	28	14
5	450	450	350	300	175
125	31	31	24	20	12
6	450	450	350	300	175
150	31	31	24	20	12
8	450	450	350	300	150
200	31	31	24	20	10

Model Z05 on Stainless Steel Pipe					
Nom. Size	Cut-Grooved		Roll-Grooved		
	Sch. 80S PSI / Bar	Sch. 40S PSI / Bar	Sch. 40S PSI / Bar	Sch. 10S PSI / Bar	Sch. 5S PSI / Bar
1¼	600	600	450	300	250
32	42	42	31	20	17
1½	600	600	450	300	250
40	42	42	31	20	17
2	600	600	450	300	250
50	42	42	31	20	17
2½	600	600	450	300	250
65	42	42	31	20	17
3	600	600	450	300	250
80	42	42	31	20	17
4	600	600	450	300	200
100	42	42	31	20	14
5	450	450	300	200	NR
125	31	31	20	14	
6	450	450	300	125	NR
150	31	31	20	9	
8	450	450	300	100	NR
200	31	31	20	7	

MATERIAL SPECIFICATIONS

- **Housing:**

Ductile Iron to ASTM A536, Gr. 65-45-12 and or ASTM A395, Gr. 65-45-15, min. tensile strength 65,000 psi (448 MPa).

- **Surface Finish:**

Standard painted finishes in orange or RAL3000 red.

- Hot dip zinc galvanized (Optional).
- Epoxy Coatings in RAL3000 red or other colors (Optional)

- **Rubber Gasket:**

Grade "E" EPDM (Color code: Green stripe) Good for cold & hot water up to +230°F (+110°C). Also good for services for water with acid, water with chlorine, deionized water, seawater and waste water, dilute acids, oil-free air and many chemicals.

Not recommended for petroleum oils, minerals oils, solvents and aromatic hydrocarbons.

Maximum Temperature Range: -30°F (-34°C) to +230°F (+110°C)*.

*EPDM gaskets for water services are not recommended for steam services unless couplings or components are accessible for frequent gasket replacement.

- (Option) "Lube-E" pre-lubricated EPDM gasket.
- (Option) **Grade "T" Nitrile** (Color code: Orange stripe) Recommended for petroleum products, air with oil vapors, vegetable and mineral oils within the specified temperature range. Also good for water services under +150°F (+66°C).
Temperature range: -20°F to +180°F (-29°C to +82°C).
Do not use for HOT WATER above +150°F (+66°C) or HOT DRY AIR above +140°F (+60°C)
- Other options: Grade "O" - Fluoroelastomer.
Grade "L" - Silicone.

For dry systems we recommend the use of the **Shurjoint** Gap Seal gasket.

For additional details contact **Shurjoint**.

- **Bolts & Nuts:**

Heat treated carbon manganese steel track bolts to ASTM A449-83a (or A183 Gr. 2), minimum tensile strength 110,000 psi (758 MPa). Zinc electroplated, with heavy-duty hexagonal nuts to ASTM A563.

General Notes:

- **ASME/ANSI Pressure-Temperature Rating** is provided as an aid in selecting a proper coupling to incorporate with other piping components (valves, flanges, and etc.) that are used in the same system and carry the ASME/ANSI rating. Select a Class 150 coupling to incorporate with Class 150 valves and flanges.
- **Maximum Working Pressure (CWP)** listed is the maximum cold water pressure for general piping services tested to ASTM F1476 and or AWWA C606 methods. Figures listed are based on roll- or cut-grooved standard wall carbon steel pipe. For other pipe schedules or pipe materials, contact **Shurjoint** for additional information.
- **Max. End Load** is calculated based on the maximum working pressure (CWP).
- **Listed and or Approved Pressures** are pressure ratings for fire protection systems, tested and approved by various approval bodies. Please always refer to the latest approval data posted on the **Shurjoint** website.
- **Field Joint Test:** For one time only the system may be tested hydrostatically at 1½ times the maximum working pressure listed (AWWA C606 5.2.3).
- **Warning:** Piping systems must always be depressurized and drained before attempting disassembly and or removal of any components.
- **The 10 Year Limited Warranty** applies to manufacturing defects only and does not cover severe service/temperature applications or wear parts.
- **Shurjoint** reserves the right to change specifications, designs and or standard without notice and without incurring any obligations.

Job Name:	System No.	Location:
Contractor:	Approved:	Date:
Engineer:	Approved:	Date:

Shurjoint product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact **Shurjoint** Technical Service. **Shurjoint** reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligations to make such changes and modifications on **Shurjoint** products previously subsequently sold.